


Specifications

Current rating: 3A
 Contact resistance: 4mΩ max.
 Insulator resistance: 1000MΩ min.
 Withstanding voltage: AC 500V / minute
 Operating temperature: -55°C ~ +105°C

ORDER INFORMATION





5 2 M I A D S 3 0 - x x x x B B x T U - 225076102 - 0 1

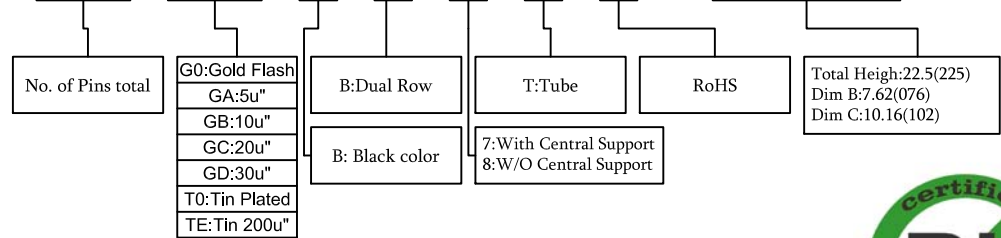

Material

Housing: PPS,UL94V-0
 Contacts: Brass

No. of Positions	W/O Central Support	With Central Support
4	v	
6	v	
8	v	
10	v	
14	v	
16	v	
18	v	v
20	v	v
22		v
24		v
28	v	v

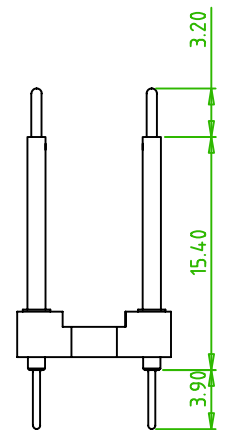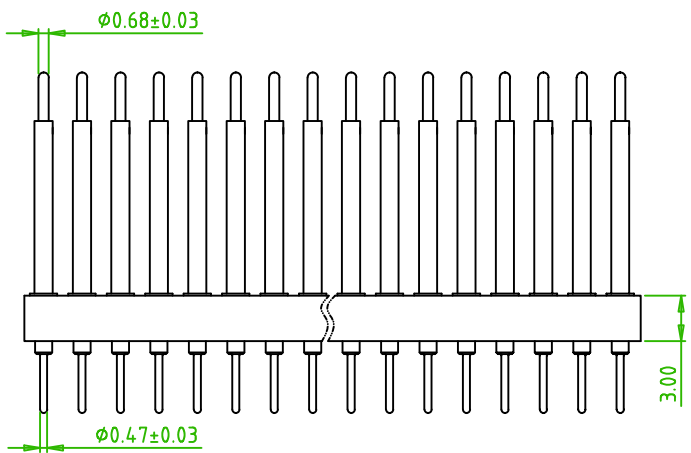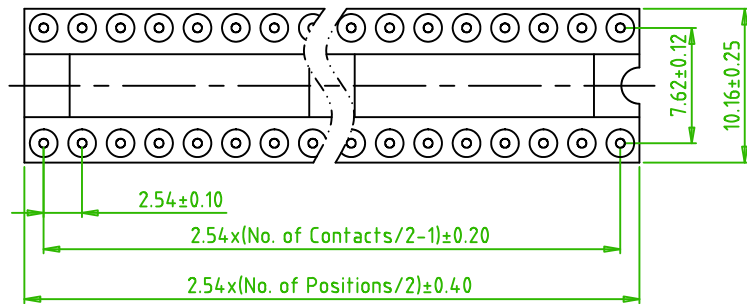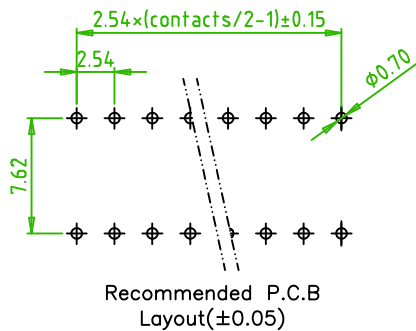

Old Part No.:MHIC-3XXGBA2250-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE		MACHINE PIN HEADER STRIP TYPE 2.54mm				頁數 Page	1/1
品號 PART NO.		52MIADS30-xxxxBBxTU -225076102-01				繪圖 DRAWN	Joen 2014/06/10
圖號 DRAWING NO.		版本 REV.		A	核對 CHECKED	Derek 2014/06/10	
客戶品號 CUSTOMER P/N		比例 SCALE		None	承認 APPROVED	Joey 2014/06/10	
公差 TOLERANCE		.X ± 0.35	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	