

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 20m Ω Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40° C to +105° C

Material


Insulator: Polyester, UL 94V-0
 ©Standard: P.B.T
 Contact Pin: Copper Alloy

ORDER INFORMATION




P H 1 D 2 5 - 2 X X X X AL1/B - L

©Standard Recommend


No. of contacts per row (02-40)	<input type="checkbox"/> Gold Flash GA:50" GB:100" GC:200" GD:300" TE: Tin Plated T: Tin TE: Tin 2000"	<input type="checkbox"/> Selective SA:50" SB:100" SC:200" SD:300"	<input type="checkbox"/> Black Insulator W: White Insulator G: Nylon natural	<input type="checkbox"/> Fill In Dimension For Special Design	<input type="checkbox"/> L: RoHS + P.B.T
------------------------------------	---	---	--	--	--

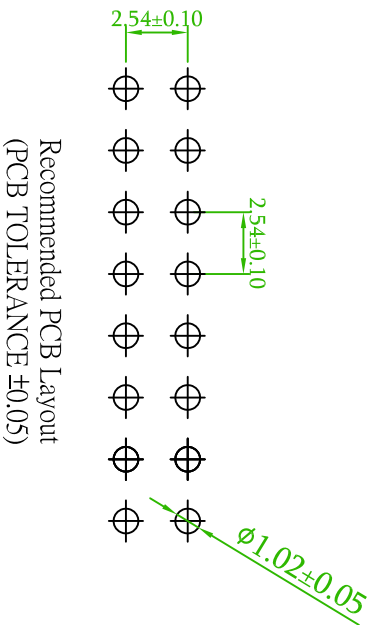

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

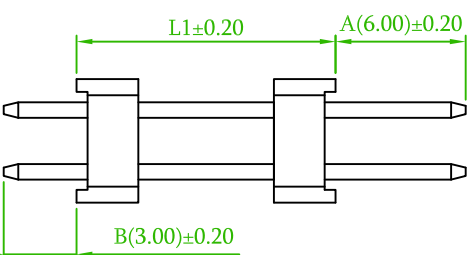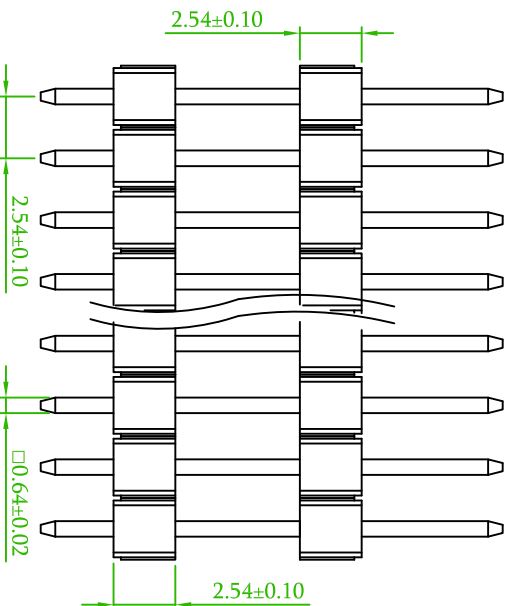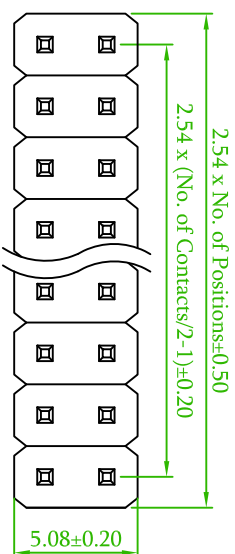

AREA	REV.	DESCRIPTION	DATE

 禮德精密有限公司 Amitek Technology Co., Ltd. TEL: 86-25-26863636 FAX: 86-25-26863633		PIN HEADER 2.54mm STACK STRAIGHT TYPE	
		PLASTIC HEIGHT 2.54mm	
品名 TITLE	PH1D25-2XX-L	日期 DATE	2010/11/24
品號 PART NO.	PH1D25-2XX-L	繪圖 DRAWN	Joe
圖號 DRAWING NO.	PH1D25-2XX-L	版本 REV.	A
客戶品號 CUSTOMER P/N		比例 SCALE	FREE
公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm
		核對 CHECKED	Simmys
		核准 APPROVED	James

