

ORDER INFORMATION

5 2 P H E M R 1 5 - X X X X B B 1 X U - xxx000000 - 0 1








SPECIFICATION

Current Rate :1 AMP
 Insulation Resistance :1000 MW Min
 Contact Resistance : 20m W Max
 Dielectric voltage : 500V AC for one minute
 Operation Temperature : -55°C to +105°C

MATERIAL

Insulator : High Temperature Thermoplastic,UL 94V-0
 Contact : Copper Alloys

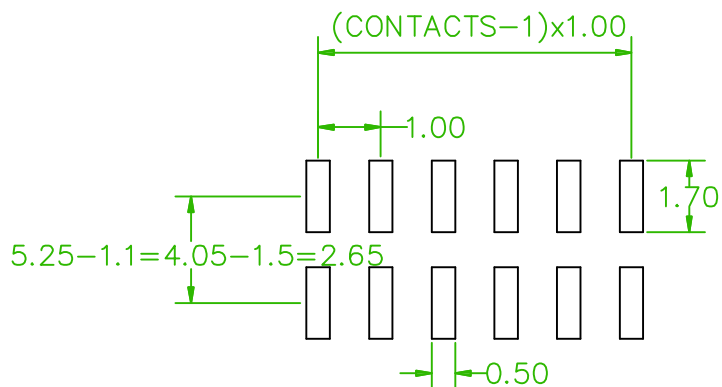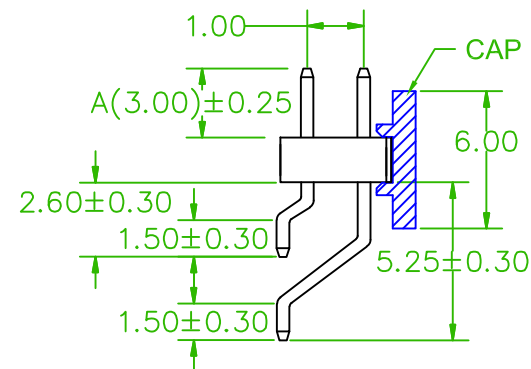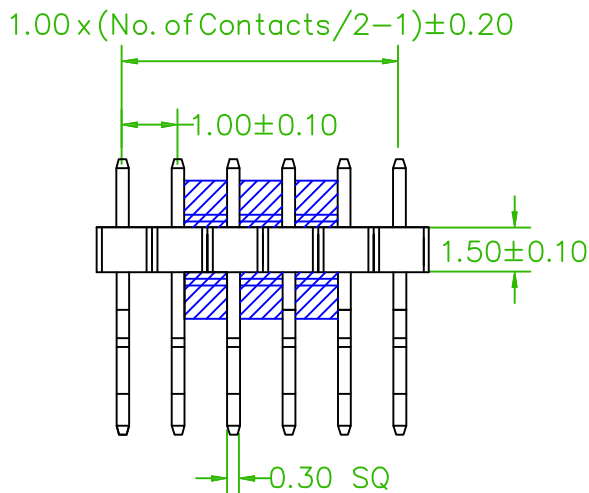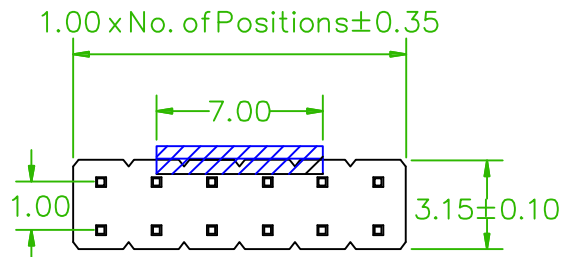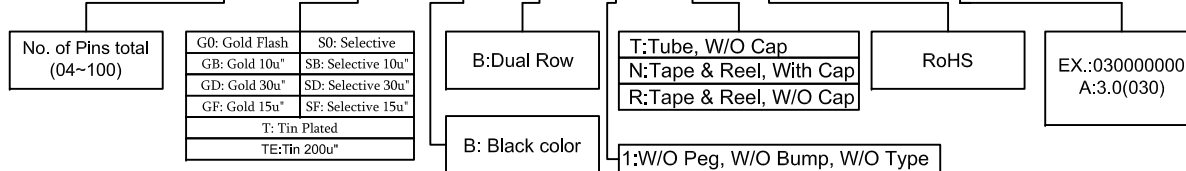

RECOMMENDED P.C.B LAYOUT

Old Part No.:PH5MR-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035</p>	品名 TITLE	PIN HEADER 1.0mm PLASTIC HEIGHT=1.5mm SMT TYPE			頁數 Page	1/1
	品號 PART NO.	52PHEMR15-xxxxBB1xU -xxx000000-01			繪圖 DRAWN	Kaiser 2013/12/16
	圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	Bonnie 2013/12/16	
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	Joey 2013/12/16	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	