

### Specifications

Current Rating: 2A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 800V AC/minute  
 Material: Nylon 66,UL94V-0

### ORDER INFORMATION

5 H 2 0 0 1 N 0 - 1 X X X B L 0 0 A 0 1

Pitch 2.00mm

No. of contacts per row








W:White  
B:Black

B:Bag Package



RoHS



Circuit No.	Dimensions			
	A	B	C	D
02P	2.00	5.80	0.50	4.60
03P	4.00	7.80	1.68	6.60
04P	6.00	9.80	3.50	8.60
05P	8.00	11.80	5.50	10.60
06P	10.00	13.80	7.50	12.60
07P	12.00	15.80	9.50	14.60
08P	14.00	17.80	11.50	16.60
09P	16.00	19.80	13.50	18.60
10P	18.00	21.80	15.50	20.60
11P	20.00	23.80	17.50	22.60
12P	22.00	25.80	19.50	24.60
13P	24.00	27.80	21.50	26.60
14P	26.00	29.80	23.50	28.60
15P	28.00	31.80	25.50	30.60
16P	30.00	33.80	27.50	32.60
17P	32.00	35.80	29.50	34.60
18P	34.00	37.80	31.50	36.60
19P	36.00	39.80	33.50	38.60
20P	38.00	41.80	35.50	40.60
21P	40.00	43.80	37.50	42.60
22P	42.00	45.80	39.50	44.60

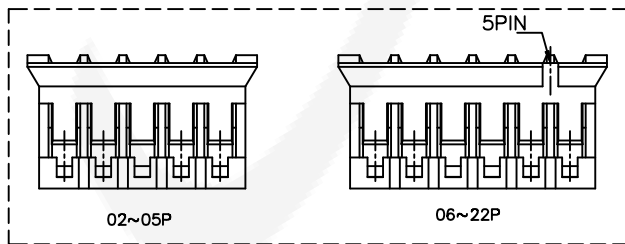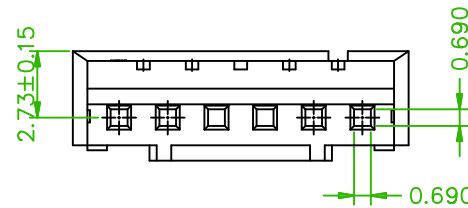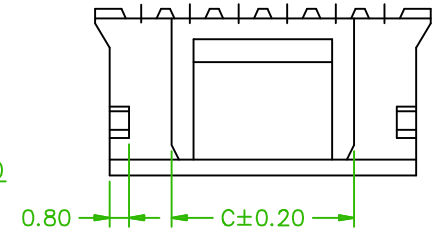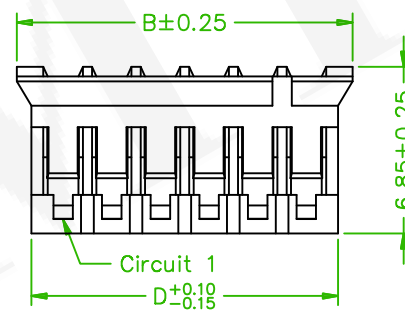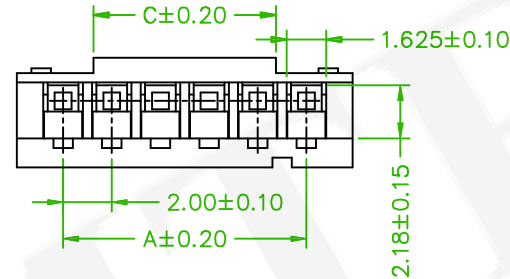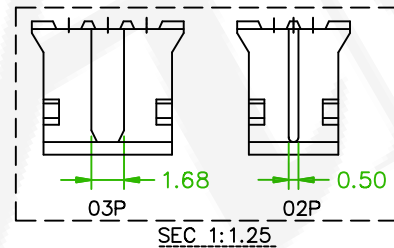

Old Part No.:2001H-XXW-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm HOUSING			頁數 Page	1/1
	品號 PART NO.	5H2001N0-1XXXBL00A01			繪圖 DRAWN	Jeff 2016/10/27
	圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	Jonny 2016/10/27	
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	Aaron 2016/10/27	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE