

MATERIAL

Insulator: PBT,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 D D A 2 5 - 1 X X X X N N X L - A L 1 B - 0 0


1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	L: RoHS+P.B.T	EX: 060XXX030 A: 6.0 L1: As Required B: 3.0
				X: Box C: Tube With Cap	B: Bag	



AMTEK 糧德
2022.01.05
Released DCC



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

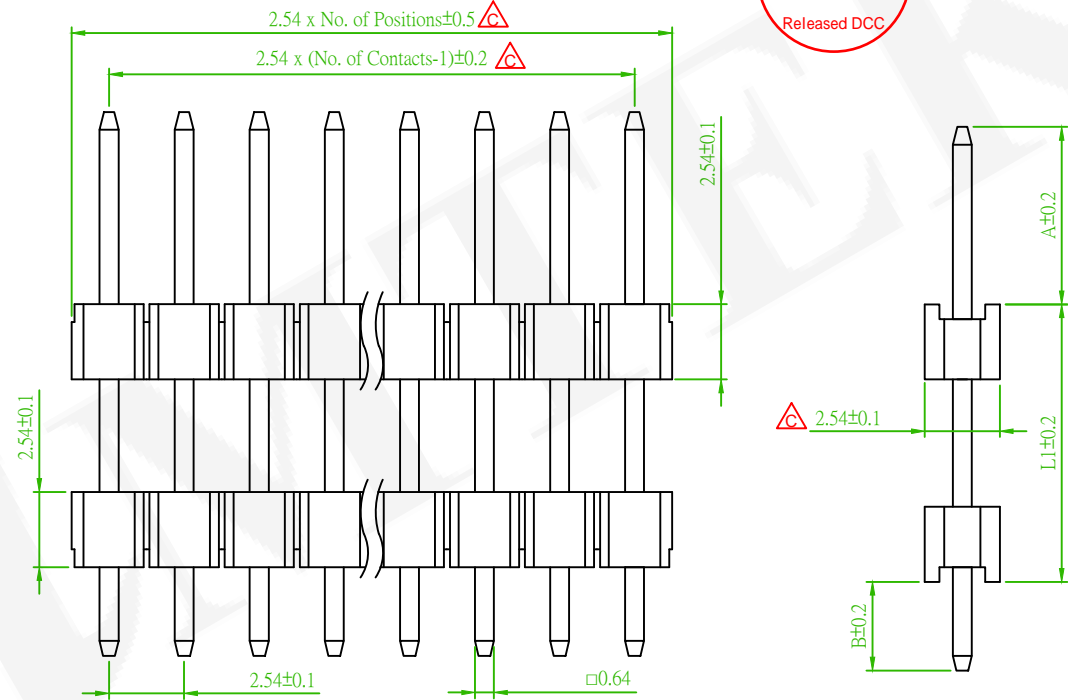

Old Part No.: PH1D25-1XX-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm			頁數 Page	1/1
	品號 PART NO.	5PH1DDA25-1XXXXNXXL -XXXXXXXXXX-00			繪圖 DRAWN	Mia 2015/08/14
	圖號 DRAWING NO.	GN016-GA110	版本 REV.	D	核對 CHECKED	John 2015/08/14
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION

	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	ECN 210104: Revise the drawing	Alice	2021/01/22
	Modify order information	B	2017/01/23 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE