


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black 
 Contact Pin: Brass 


ORDER INFORMATION

5 P H 1 M S A 2 5 - 1 X X X X N X X U - A B C - 0 0


1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	A:A Type (Odd Pin&Even Pin) B:B Type (Only Even Pin)	U:RoHS +Hi-Temp.	EX:060050033 A:6.0 B:5.0 C:3.3
				N:W/O Peg	R:T/R With Cap H:T/R W/O Cap C:Tube With Cap (5 Pin ↑) T:Tube W/O Cap (5 Pin ↑)	

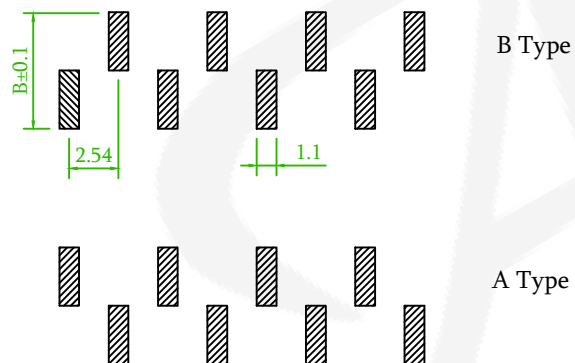


Recommended PCB Layout (PCB TOLERANCE ±0.1)

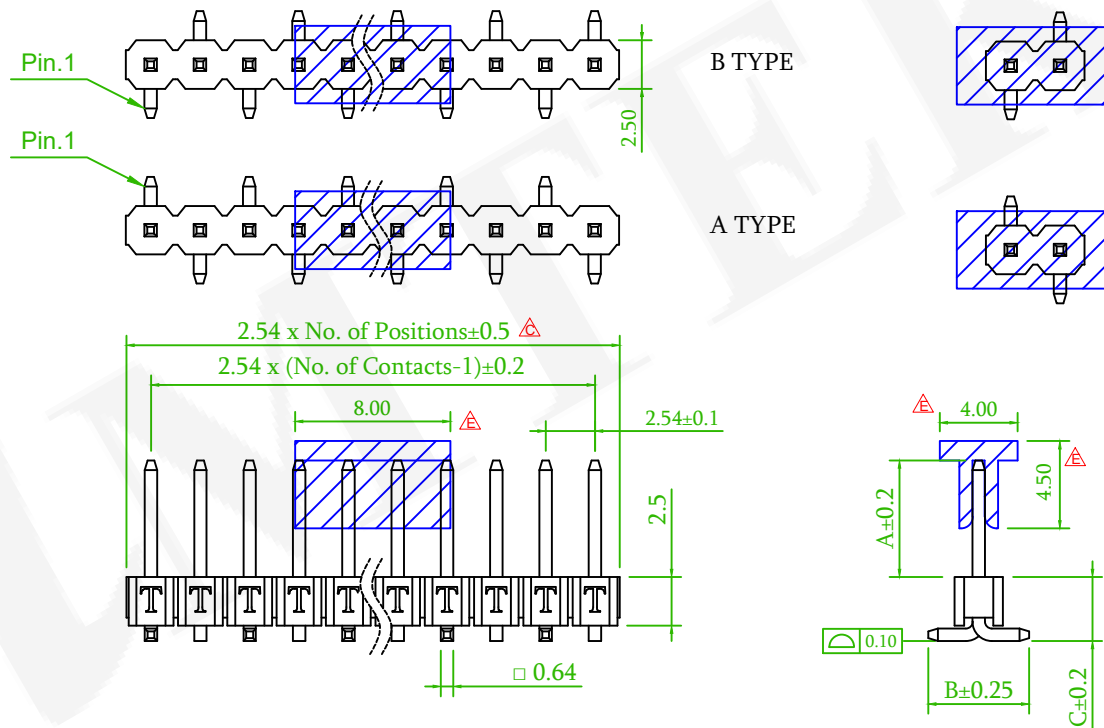




Old Part No. :PH1M25-1XX-U



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1MSA25-1XXXXNXXU -XXXXXXXXXX-00			繪圖 DRAWN	Mia 2016/12/16	
圖號 DRAWING NO.	GA000-MC147	版本 REV.	F	核對 CHECKED	Jonny 2016/12/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/16	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/20
 x3	ECN No.:200201, Revise the Cap.	David	2020/02/27
	ECR No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE