

**SPECIFICATIONS**






Current Rating: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105 °C

**MATERIAL**

Insulator: P.B.T, UL 94V-0  
 Contact Pin: Copper Alloy

**ORDER INFORMATION**

5 P H 2 D D A 1 5 - 2 X X X X N N X L - A L 1 B - 0 0

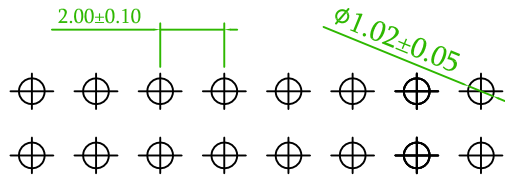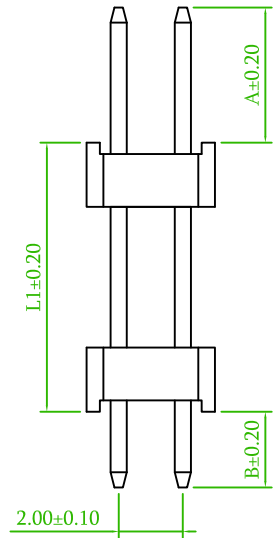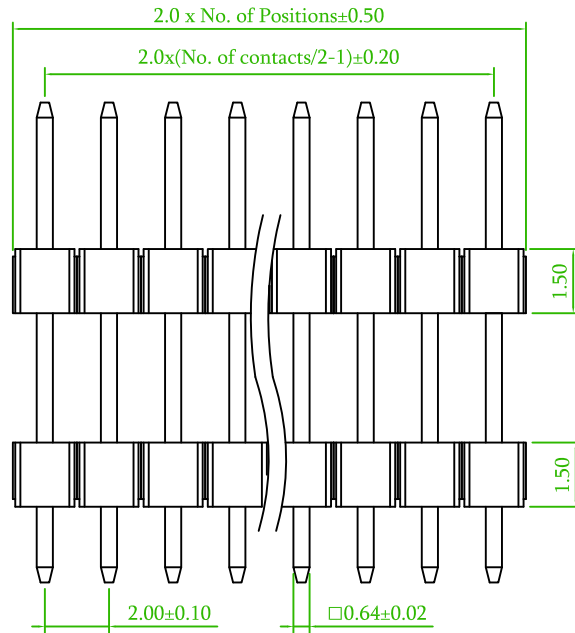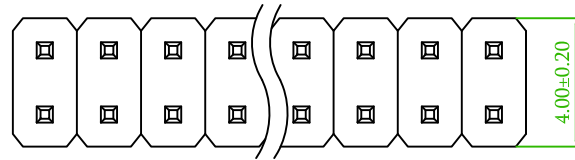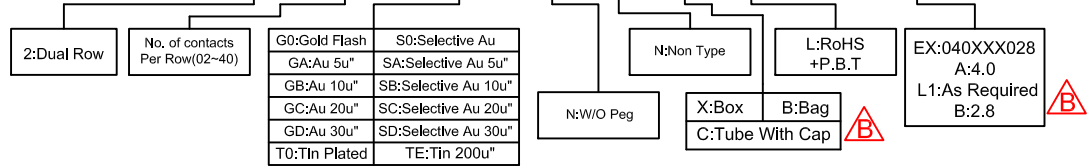

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

Old Part No. : PH2D15-2XX-L

REV.	Modify order information	B	2017/02/02 Gary
	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 1.5mm STRAIGHT DIP			頁數 Page	1/1
品號 PART NO.	5PH2DDA15-2XXXXNXXL -XXXXXXXXXX-00		繪圖 DRAWN	Athena 2015/08/14	
圖號 DRAWING NO.	GN016-GA213	版本 REV.	B	核對 CHECKED	John 2015/08/14
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	