

SPECIFICATIONS






Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature:-25°C to +85 °C

MATERIAL

Insulator:PBT, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P S 1 B S B 5 0 - 1 X X X X N N X X L - 0 0

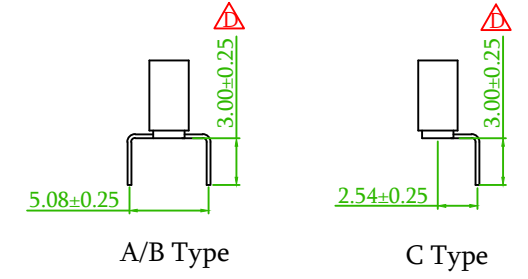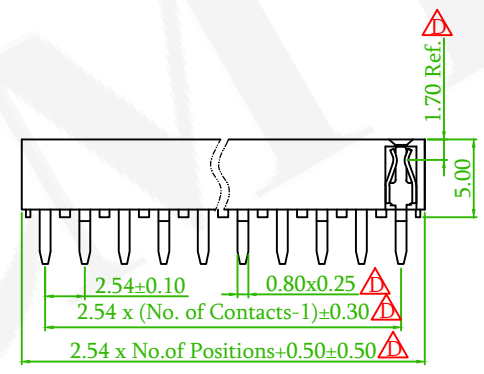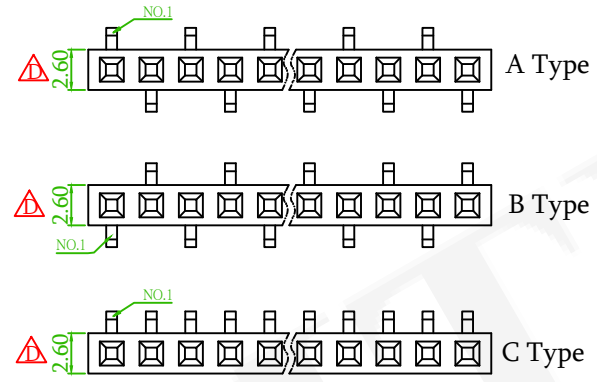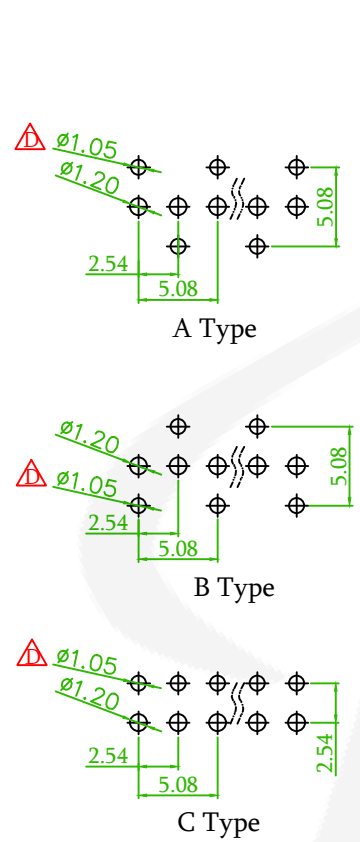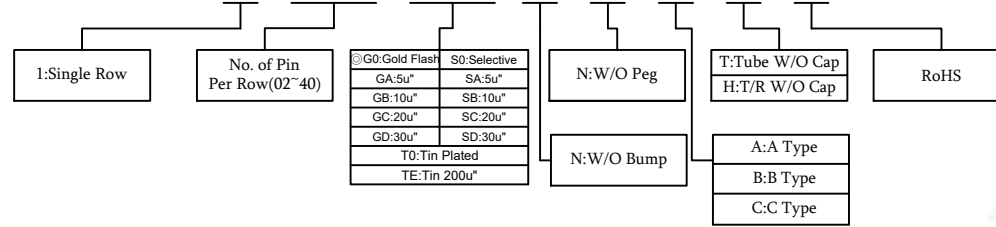

△ Recommended PCB Layout (PCB TOLERANCE ±0.05)

Old Part No. : PS1B50-1XX-L

△x13	ECN NO.:210725 Revise the drawing	Alice	2021/08/12
△x3	Add the A Type,B Type,C Type	David	2021/01/25
△x1	Add the Recommended Mating Part	Eric	2019/01/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1BSB50-1XXXXNXXL-00			繪圖 DRAWN	Roy 2017/06/14	
圖號 DRAWING NO.	GN005-RL788	版本 REV.	D	核對 CHECKED	Josh 2019/01/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/24	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	.X° ± 2°	單位 UNIT	mm	THIRD ANGLE PROJECTION	