

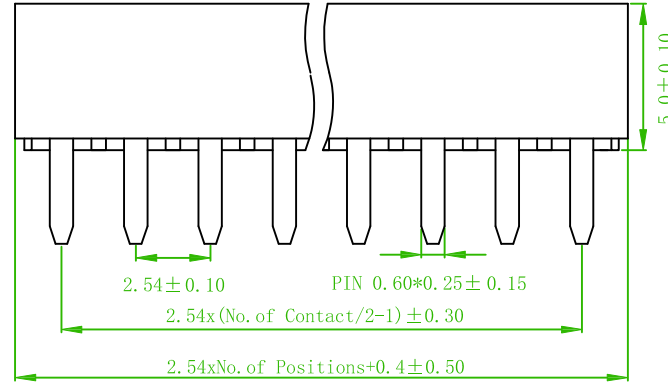
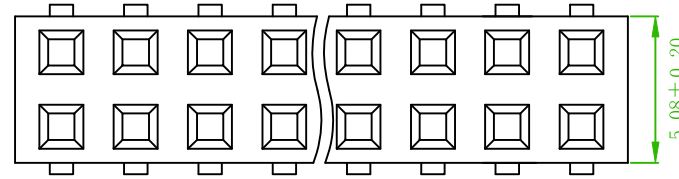
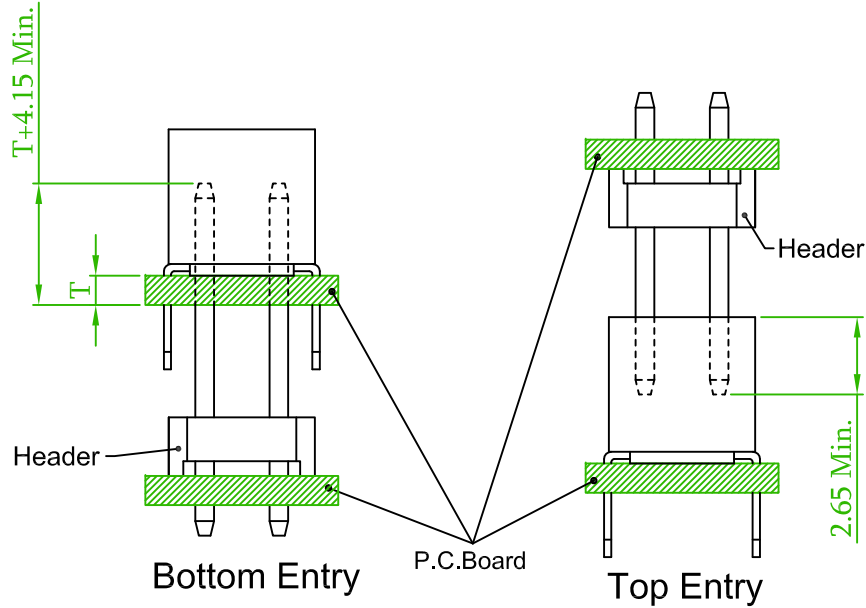


SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature:-40°C to +105°C


ORDER INFORMATION

5 P S 1 B S E 5 0 - 2 X X X X N N B T U - 0 0

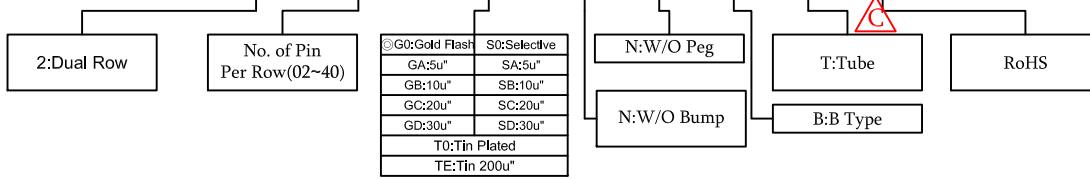

B Type

B Recommended Mating Part

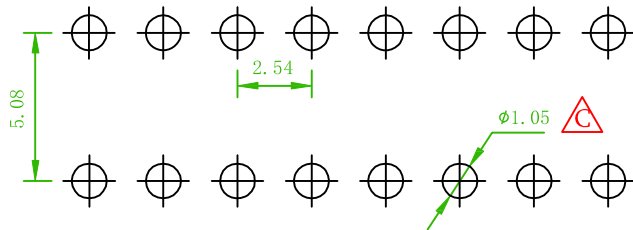

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PS1B50-2XX-B-U

△C x3	ECN.NO.190705:Cancel package option(C),Re-use the Part No,DIM	Nick	2019/08/21
△B x1	Add the Recommended Mating Part	Eric	2019/01/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1BSE50-2XXXXNBTU-00				繪圖 DRAWN	Roy 2016/11/15
圖號 DRAWING NO.	GN110-RL060		版本 REV.	C	核對 CHECKED	Josh 2019/01/25
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2019/01/25
公差 TOLERANCE	.X ± 0.38	.XX ± 0.25	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION