

SPECIFICATION



Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40°C to +105°C
 Dielectric Voltage: 1000V AC for one minute

MATERIAL





Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper alloy

ORDER INFORMATION

5 P S 1 M S A 8 5 - 2 X X X X N N N X U - 0 0

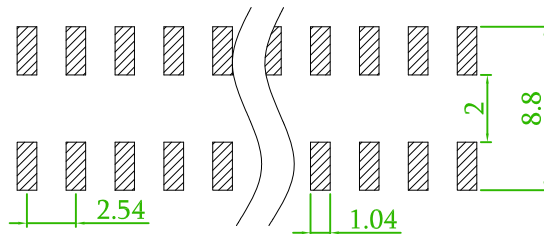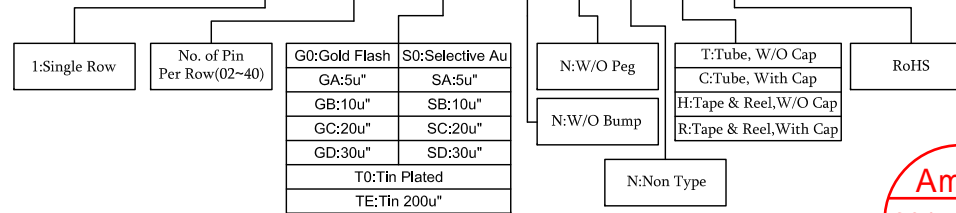

PCB LAYOUT TOLERANCE ±0.1

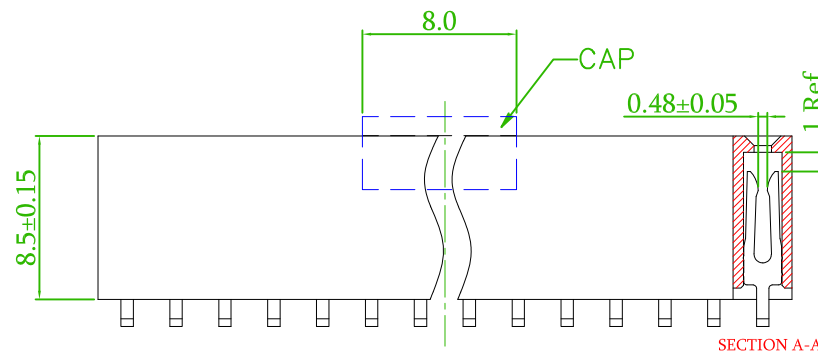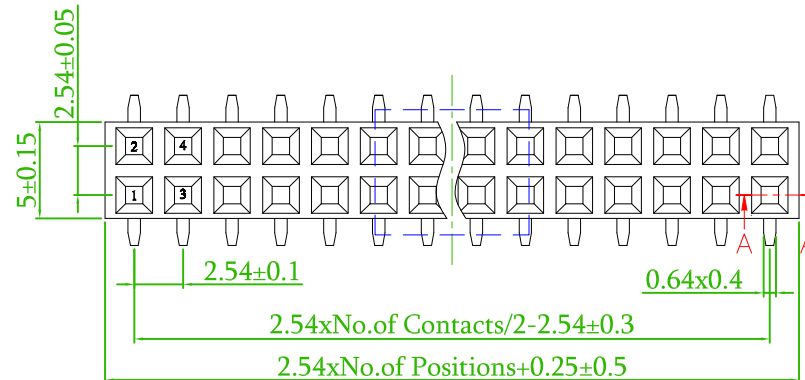

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm PLASTIC HEIGHT			頁數 Page	1/1
	品號 PART NO.	5PS1MSA85-2XXXXNXXU-00			繪圖 DRAWN	Andy 2017/09/14
	圖號 DRAWING NO.	GN003-AA056	版本 REV.	A	核對 CHECKED	Carol 2017/09/14
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	承認 APPROVED	Jason 2017/09/14
	公差 TOLERANCE	.X ± 0.4 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	