

# ORDER INFORMATION



## SPECIFICATIONS

Current Rating: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C




## MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black  
 Contact Pin: Copper Alloy

5 P S 1 M S B 7 1 - 2 X X X X N X N X U - 0 0

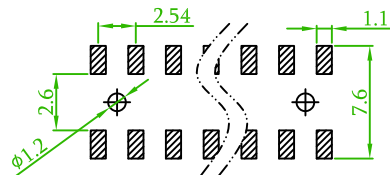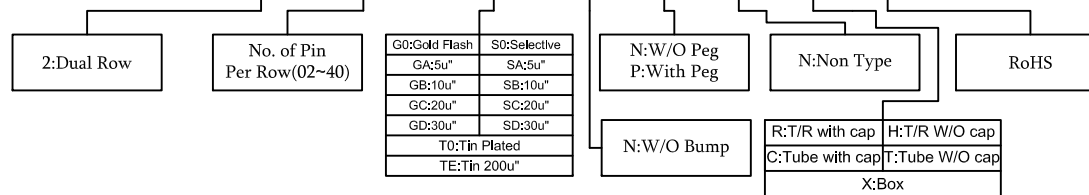


Recommended P.C.B Layout  
 (PCB BOARD TOLERANCE±0.1)

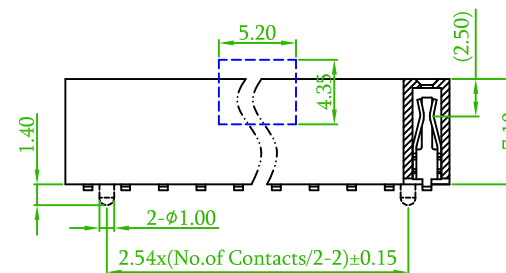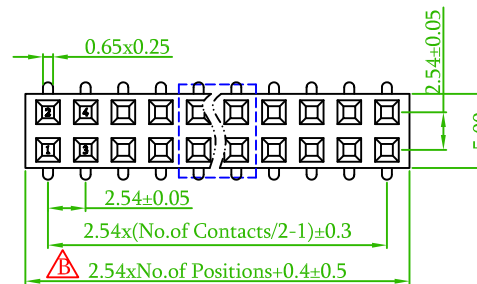

Old Part No. : PS1M71-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECR No.:170641	B	2017/07/05 Roy

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1MSB71-2XXXXNXNXU-00				繪圖 DRAWN	Sinnys 2010/10/21
	圖號 DRAWING NO.	GN005-RL220	版本 REV.	B	核對 CHECKED	Kelvin 2010/10/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/10/21	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	