

# ORDER INFORMATION





## SPECIFICATION

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -25°C to +85°C

## MATERIAL

Insulator:PBT, UL94V-0, Black  
 Contact Pin:Copper Alloy

5 P S 1 S D A 8 5 - 1 X X X X N N N X L - 0 0

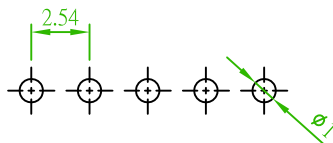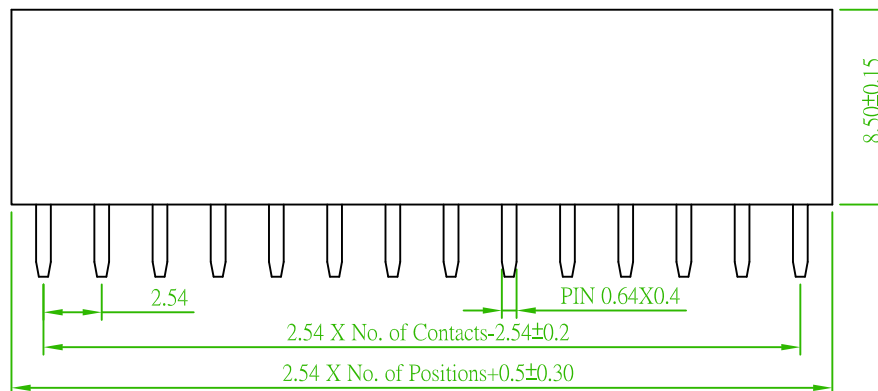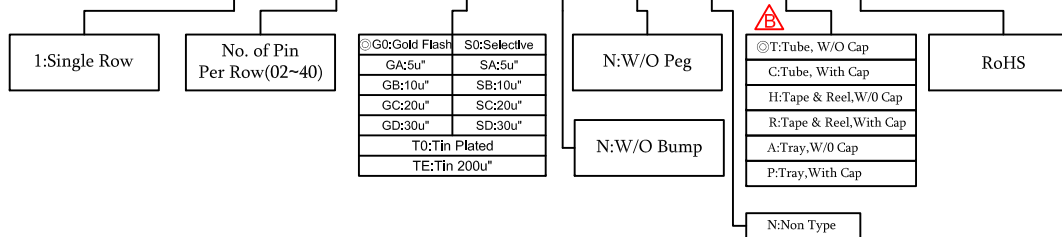

Recommended PCB Layout  
 (PCB TOLERANCE ±0.1)

Old Part No. : PS1S85-1XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△X1	Add the Package:Tray	Mia	2018/01/05

耀德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm V/T S/R DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PS1SDA85-1XXXXNXXNL-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-MC866		版本 REV.	B	核對 CHECKED	John 2015/08/27
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/08/27
公差 TOLERANCE	.X ± 0.25	.XX ± 0.20	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION