

ORDER INFORMATION




SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

5 P S 1 S H A 5 9 - 2 X X X X N N N X U - 0 0

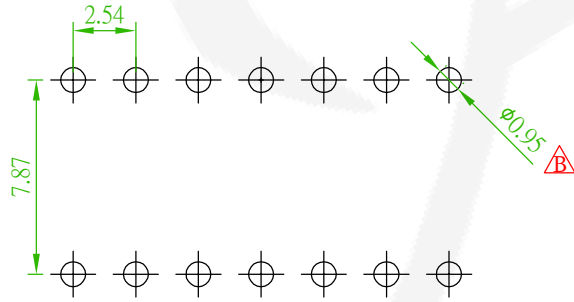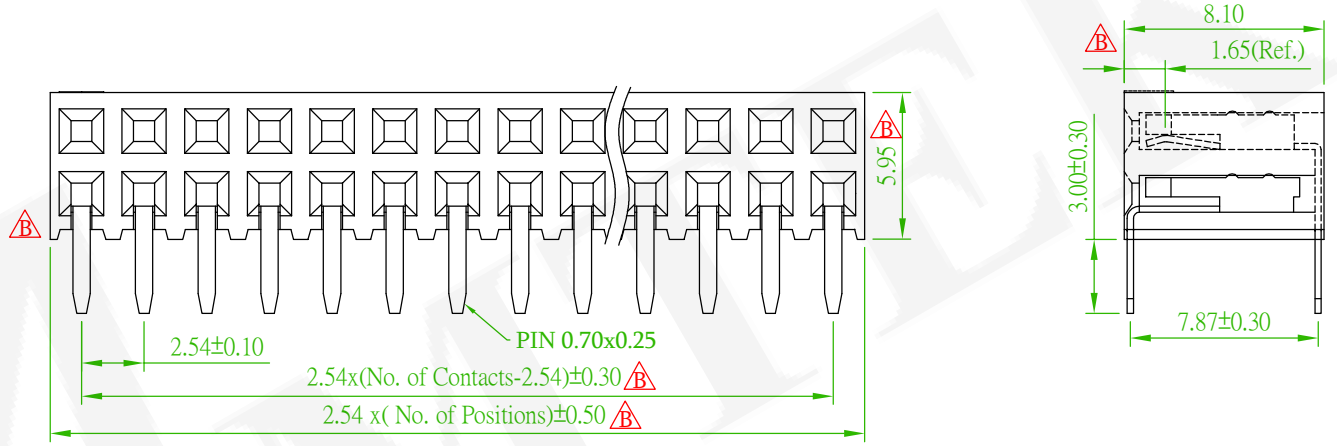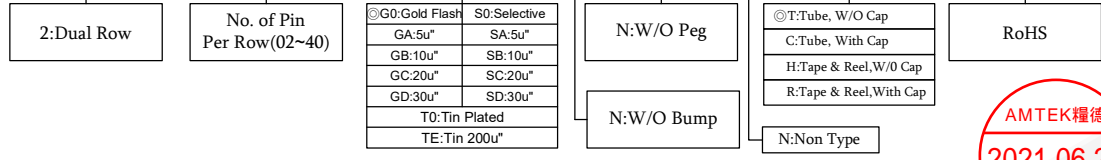

Recommended PCB Layout
 (PCB TOLERANCE ±0.05) Δ B

Old Part No. : PS1RS-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm			頁數 Page	1/1	
	品號 PART NO.	5PS1SHA59-2XXXXNXXU-00			繪圖 DRAWN	Jeff 2015/08/27	
	圖號 DRAWING NO.	GN003-DV647	版本 REV.	B	核對 CHECKED	John 2015/08/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
	公差 TOLERANCE	.X ± 0.38 Δ B	.XX ± 0.25 Δ B	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION

Δ Bx8	ECN NO.: 210543 Revise the Drawing	Benson	2021/06/04
REV.	DESCRIPTION	REVISED	DATE