



SPECIFICATION

Storage Temperature: -40°C to +85°C
 Operation Temperature: -20°C to +70°C
 Mechanical Life: 2000 Cycles Min.
 Electrical Life: 2000 Cycles 25mA 24V DC
 Non-Switching Rating: 100mA, 50V DC
 Switching Rating: 25mA, 24V DC
 Contact Resistance: 50mΩ Max.

MATERIAL



Base: PBT, UL94V-0, Black
 Cover: PBT, UL94V-0, Black/Red/Blue
 Actuators: PBT, UL94V-0, White

P/N	No. of Contacts	DIM. A	DIM. B
64SWT-AD1X111	1	4.01	
64SWT-AD2X111	2	6.58	2.54
64SWT-AD3X111	3	9.18	5.08
64SWT-AD4X111	4	11.72	7.62
64SWT-AD5X111	5	14.26	10.16
64SWT-AD6X111	6	16.80	12.70
64SWT-AD7X111	7	19.34	15.24
64SWT-AD8X111	8	21.88	17.78
64SWT-AD9X111	9	24.42	20.32
64SWT-ADAX111	10	26.96	22.86
64SWT-ADCX111	12	32.04	27.94

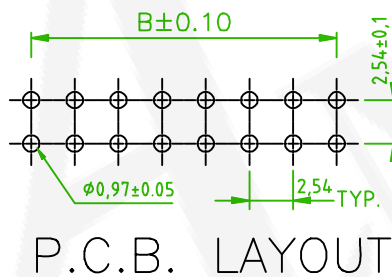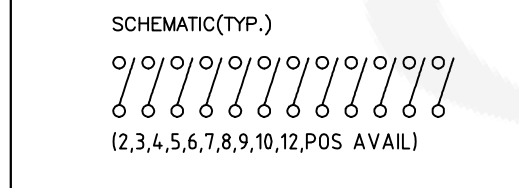

ORDER INFORMATION

6 4 S W T - A D X X 1 1 1

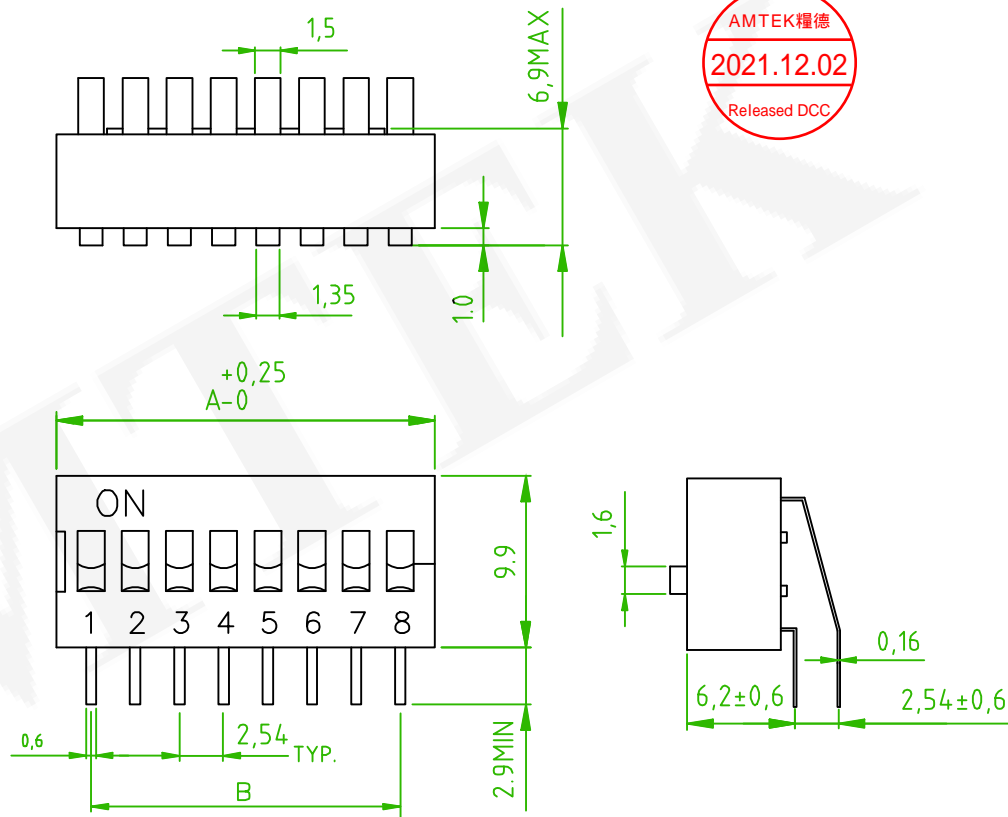

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035	品名 TITLE	DIP SWITCH				頁數 Page	1/1
	品號 PART NO.	64SWT-ADXX111			繪圖 DRAWN	Roy 2016/03/31	
	圖號 DRAWING NO.	GN114-MC033	版本 REV.	E	核對 CHECKED	Josh 2019/01/25	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/25	
	公差 TOLERANCE	± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
x2	QEC NO.:211113 Revise the drawing	Alice	2021/12/01
x3	Add the Table	Roy	2019/01/25
x1	ECN NO.: 180814, revise the annotation: Slide ->Dip.	Gary	2018/10/22