Specifications

Current Rate:3 AMP
Insulation Resistance:1000M Ω Min.
Contact Resisitance:20m Ω Max.
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40˚C to +105˚C

Material

Insulator:Polyester,UL 94V-0
◎Standard:Nylon-6T
Contact Pin:Copper Alloy
Tin,Gold plated◎Standard:Gold flash all over

ORDER INFORMATION

P H 1 M 2 5 - 2 X X X X X X X A/B/C - U

◎:Standard Recommend

- No. of contacts per row (02~50)
- ◎G:Gold Flash | S:Selective
  - GA:5u" | SA:5u"
  - GB:10u" | SB:10u"
  - GC:20u" | SC:20u"
  - GD:30u" | SD:30u"
  - T:Tin Plated
  - TE:Tin 200u"
- ◎B:Black insulator W:White insulator N:Nylon natural
- ◎O:W/O Cap C:With Cap
- ◎O:W/O Peg P:With Peg
- T:Tube R:Taping & Reel
- Fill In Dimension For Special Design
- U:RoHS + Nylon 6T

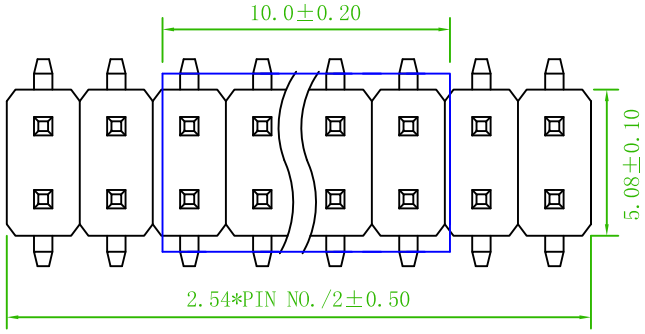

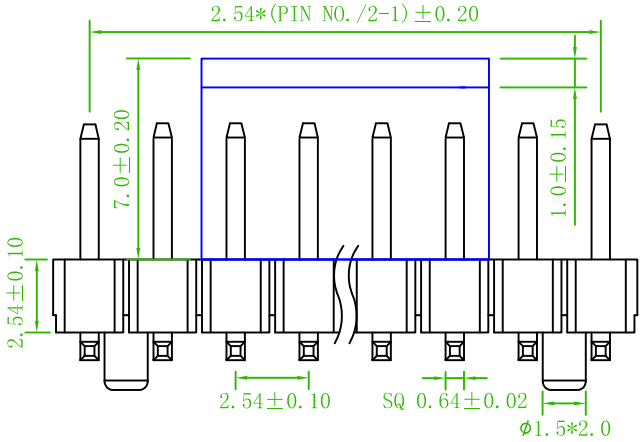

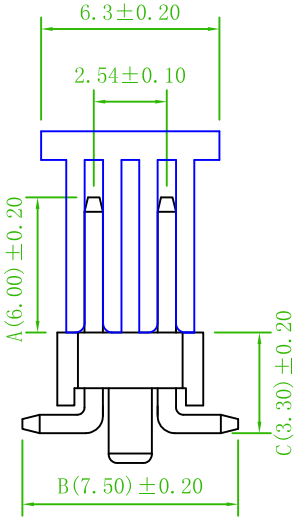

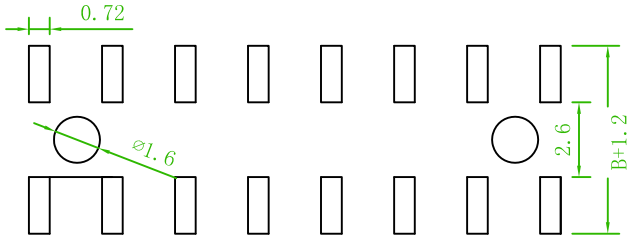

P.C.B LAYOUT

AREA	REV.	DESCRIPTION	DATE

品 名 TITLE	PIN HEADER 2.54mm SMT TYPE PLASTIC HEIGHT 2.5mm				
品 號 PART NO.	PH1M25-2XX-U			日 期 DATE	2010/07/15
圖 號 DRAWING NO.	PH1M25-2XX-U	版 本 REV.	A	繪 圖 DRAWN	Joe
客戶品號 CUSTOMER P/N		比 例 SCALE	FREE	核 對 CHECKED	Sinnys
公 差 TOLERANCE	.X ±0.20 .XX ±0.15	單 位 UNIT	mm	核 准 APPROVED	James

AMTEK
糧德企業有限公司
Amtek Technology Co., Ltd.
TEL:886-2-2268-8036
FAX:886-2-2268-8035