

SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40°C to +105 ° C





MATERIAL
 Insulator:Polyester , Nylon 6T , UL 94V-0
 Terminal: Copper Alloy
 Plated: Gold Plated

ORDER INFORMATION

PH1MR-2XX-U



No. of contacts per row (02-40)	① Gold Flash GA:50" GB:100" GD:300" TE: Tin 200µ"	② Selective SA:50" SB:100" SD:300"	③ Black Insulator W/White Insulator G/Nylon natural	④ W/O Peg	⑤ Fill in Dimension For Special Design	⑥ RoHS + Nylon 6T
◎Standard Recommend			⑦ W/O Cap C/W/In Cap	⑧ Bag Package T/Triple R/Taping & Reel		

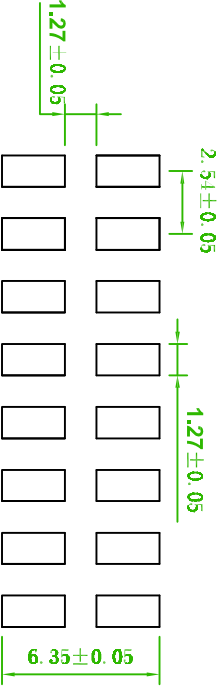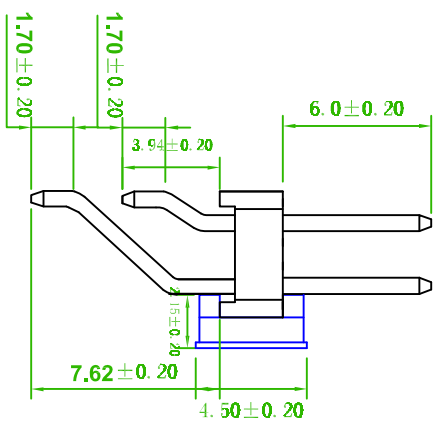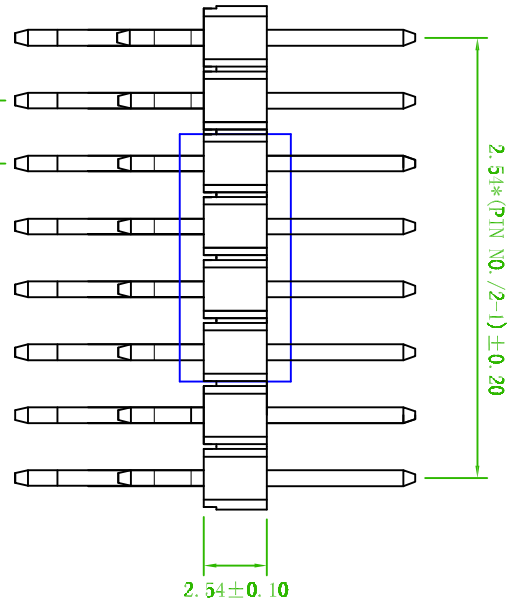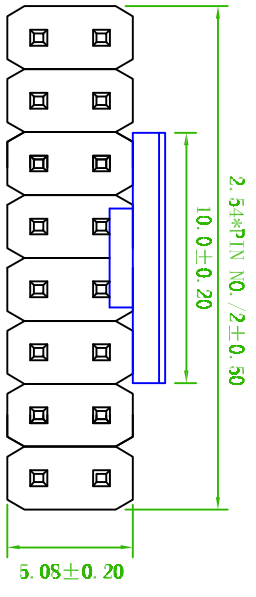

Recommended PCB Layout
 (PCB tolerance ± 0.05)

AREA	REV.	DESCRIPTION	DATE

		<p>耀德企業有限公司 Amtek Technology Co., Ltd. TEL:886-2-2686-8886 FAX:886-2-2686-8855</p>	
品名	PIN HEADER 2.54mm SMT RIGHT ANGLE TYPE	日期	2010/05/19
品號	PH1MR-2XX-U	繪圖	Simmys
圖號	PH1MR-2XX-U	版本	A
客戶品號		比例	FREE
CUSTOMER P/N		單位	mm
公差	.XX ±0.25	核對	Yvonne
TOLERANCE		核准	James