

ORDER INFORMATION

P H 1 S 2 5 - 2

X X

X

X

A/B

-

L

◎:Standard Recommend

No. of contacts per row
(02-50)

◎G:Gold Flash GA:50"	S:Selective SA:50"
GB:100"	SB:100"
GD:200"	SD:200"
GF:150"	SF:150"
T: Tin Plated	
TE: Tin 2000"	



◎Black Insulator
W:White Insulator
G:NYlon natural

Fill In Dimension For
Special Design


L:RoHS + P.B.T




SPECIFICATION
 Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40 °C to +105 °C
MATERIAL
 Insulator:Polyester, UL 94V-0◎Standard:P.B.T
 Contact Pin: Copper Alloy
 Tin, Gold plated◎Standard:Gold flash all over

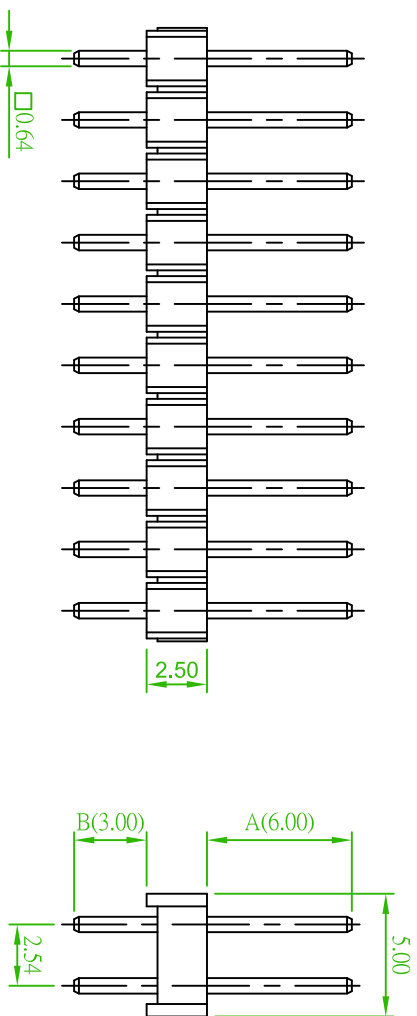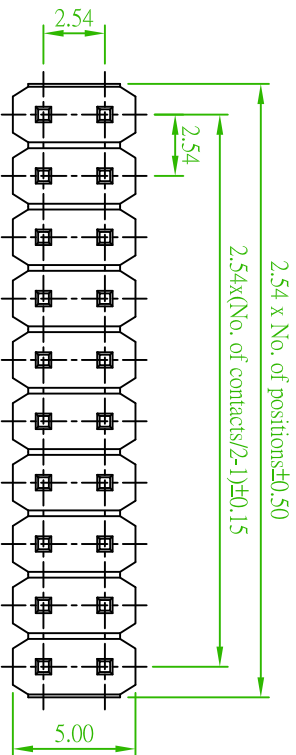

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

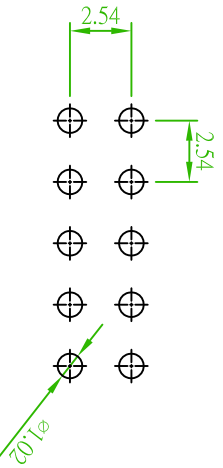

AREA		REV.	DESCRIPTION	DATE
 耀德企業有限公司 Amtek Technology Co., Ltd. TEL:886-2-206-8036 FAX:886-2-206-8035				
品名		PIN HEADER 2.54mm STRAIGHT TYPE		
TITLE		PLASTIC HEIGHT 2.5mm		
品號	PH1S25-2XX-L			
PART NO.	PH1S25-2XX-L			
圖號	PH1S25-2XX-L			
DRAWING NO.	PH1S25-2XX-L			
客戶品號	X ±0.35			
CUSTOMER P/N	.XX ±0.25			
公差	TOLERANCE			
單位	mm			
SCALE	FREE			
比例	SCALE			
版本	A			
REV.	REV.			
繪圖	DRAWN			
日期	DATE			
03/26/2007	03/26/2007			
核對	CHECKED			
Paul	Paul			
核准	APPROVED			
James	James			