

SPECIFICATION

Current Rate: 1 AMP
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 20m Ω Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL
 Insulator: Polyester, UL 94V-0
 ◎Standard: Nylon 6T
 Contact Pin: Copper Alloy
 Tin, Gold plated ◎Standard: Gold flash all over

ORDER INFORMATION

P H 2 D M 1 5 - 2

X X X

B X X




X X X

A/L1/B



-

U

◎Standard Recommend

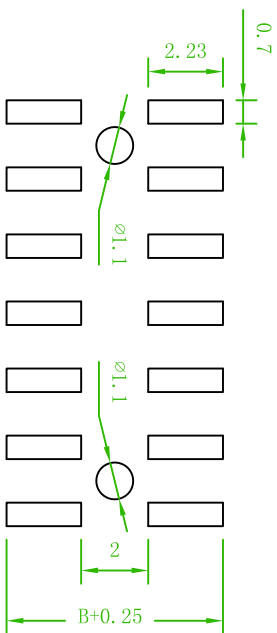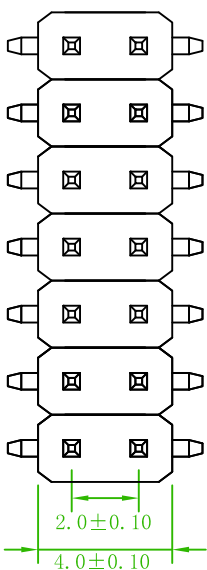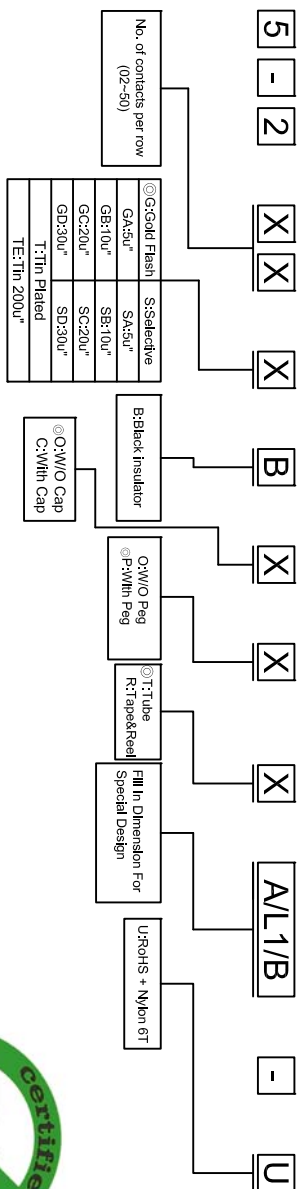

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

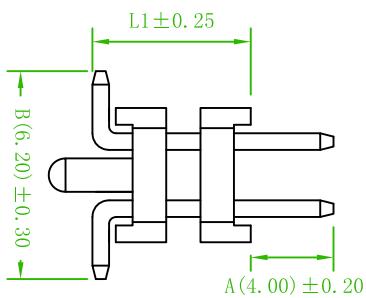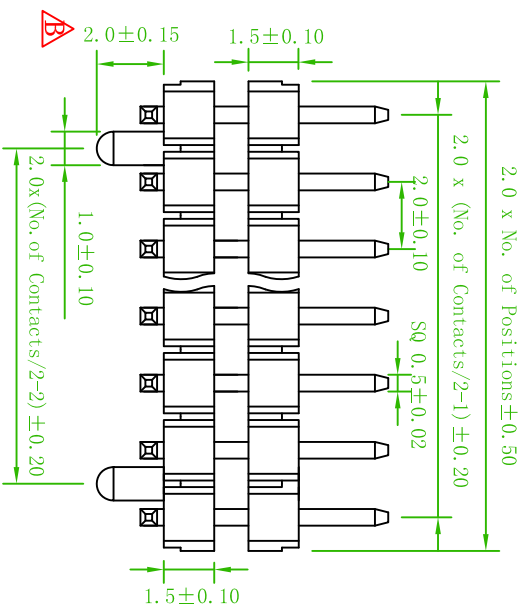

AREA	REV.	DESCRIPTION	DATE
B		Revised the Dim.: 1.50 -> 2.00mm	2011/08/03
			Joe

<p>禮德企業有限公司 Amitek Technology Co., Ltd. TEL: 886-2-2268-8855 FAX: 886-2-2268-8855</p>		<p>PIN HEADER 2.0mm STACK SMT TYPE PLASTIC HEIGHT 1.5mm</p>	
品名	PH2DM15-2XX-U	日期	2010/11/30
品號	PH2DM15-2XX-U	繪圖	Joe
圖號	PH2DM15-2XX-U	版本	B
客戶品號	PH2DM15-2XX-U	比例	FREE
公差	.XX ±0.25	單位	mm
	.XX ±0.2	核對	James
		核對	James