



**Spelcifications**

Current Rate:3 AMP  
 Insulation Resistance:1000 MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C


**Material**

Insulator Material:High Temperature Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plated: Tin or Gold Plated


**ORDER INFORMATION**

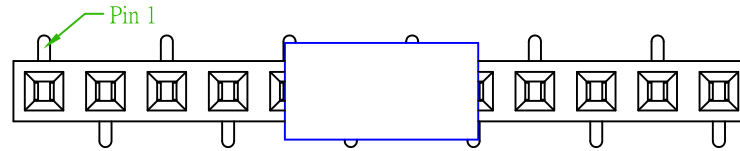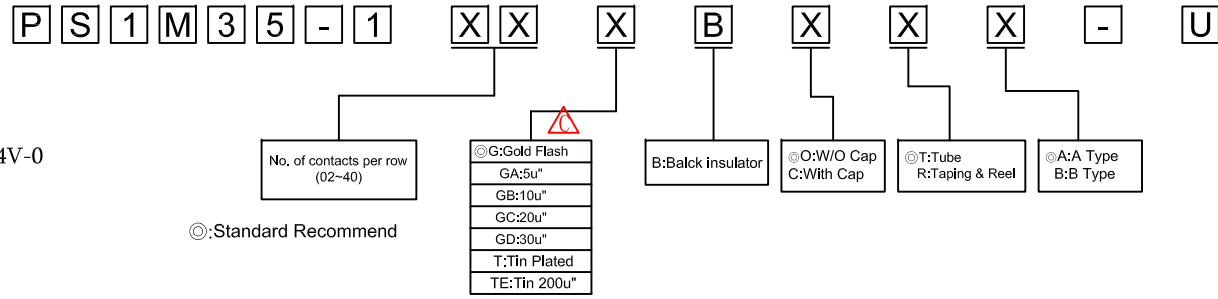


A Type

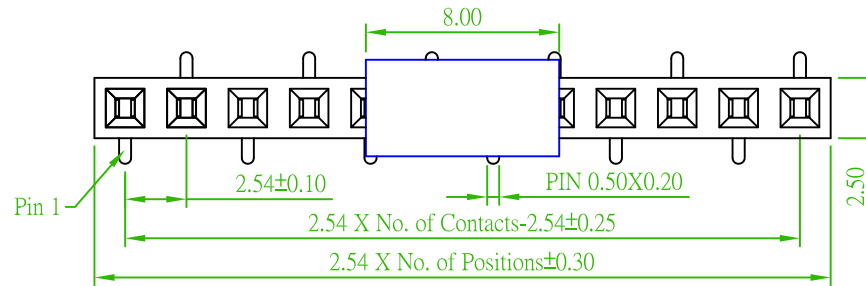

B Type

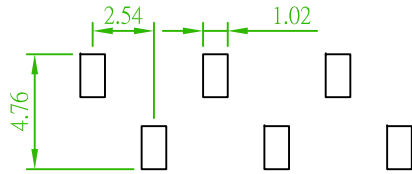



A Type

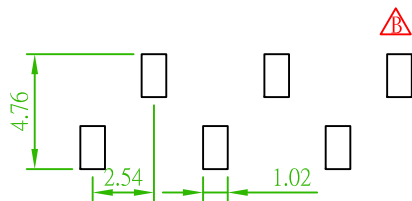

B Type

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

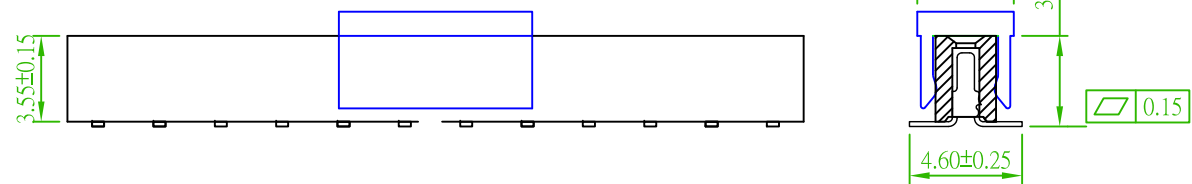

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL:886-2-2268-8036 FAX:886-2-2268-8035	品名 TITLE	FEMALE HEADER 2.54mm PLASTIC HEIGHT 3.55mm SMT				
	品號 PART NO.	PS1M35-1XX-U			日期 DATE	11/29/2007
	圖號 DRAWING NO.	PS1M35-1XX-U	版本 REV.	C	繪圖 DRAWN	Kent
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Paul
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	核准 APPROVED	James

⚠	C	Delete the Selective Plating Options	2012/10/08 Jeff
⚠	B	Delect Bottom Entry Layout.	2009/07/29 Sinnys
AREA	REV.	DESCRIPTION	DATE