





Specifications

Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:550V AC for one minute
 Operation Temperature:-55° C to +105° C

Material

Insulator Material:Hi-Temp. Thermoplastic, UL 94V-0
 Contact Material:Copper Alloy

ORDER INFORMATION

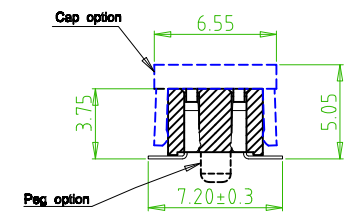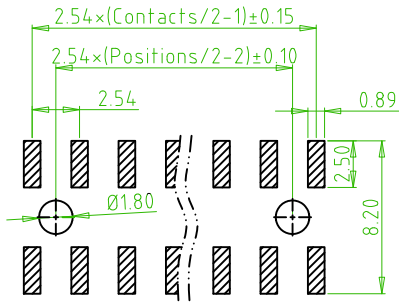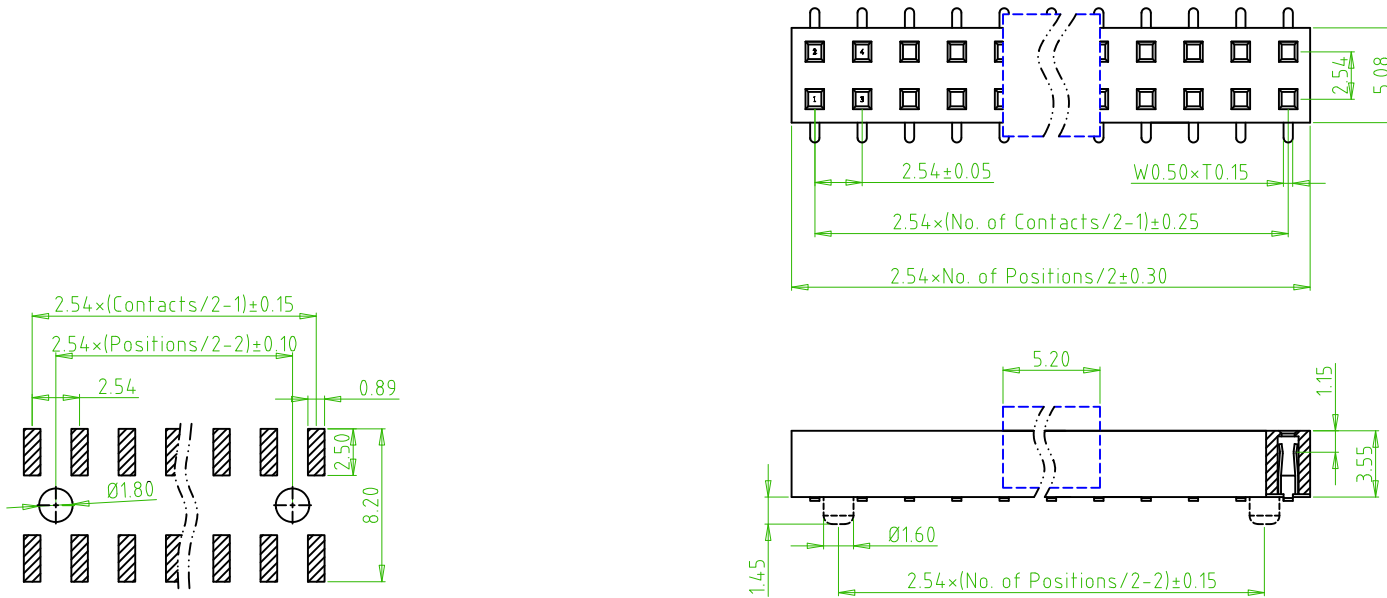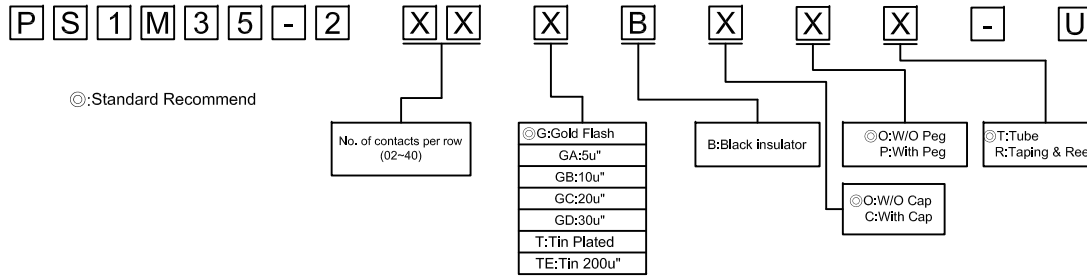

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

REV.	DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名	FEMALE HEADER 2.54mm				
	TITLE	PLASTIC HEIGHT 3.55mm SMT				
	品號	PS1M35-2XX-U			繪圖	Roy
	PART NO.				DRAWN	2015/09/23
	圖號	版本	A	核對	Wanling	2015/09/23
	DRAWING NO.	REV.		CHECKED		
客戶品號	比例	None	承認	John	2015/09/23	
CUSTOMER P/N	SCALE		APPROVED			
公差	.X ± 0.30	.X° ± 3°	單位	mm	THIRD ANGLE PROJECTION	
TOLERANCE	.XX ± 0.20		UNIT			