






Specifications

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric Voltage:550V AC for one minute
 Operation Temperature:-55°C to +105°C

Material

Insulator Material:Polyester,UL 94V-0
 ◎Standard:P.B.T+30%G.F
 Terminal:Copper Alloy

ORDER INFORMATION

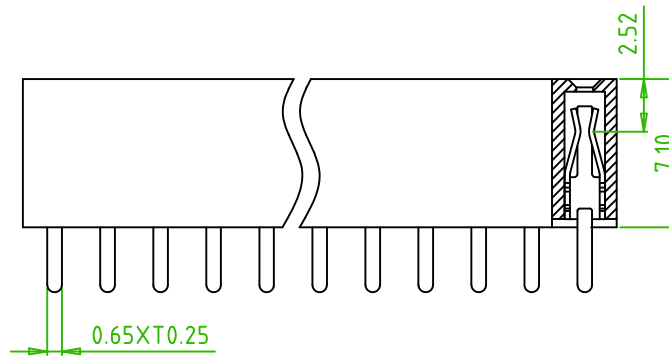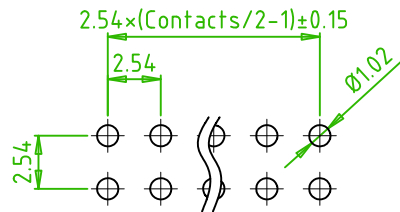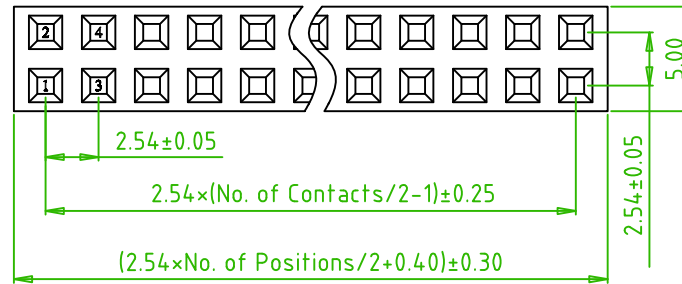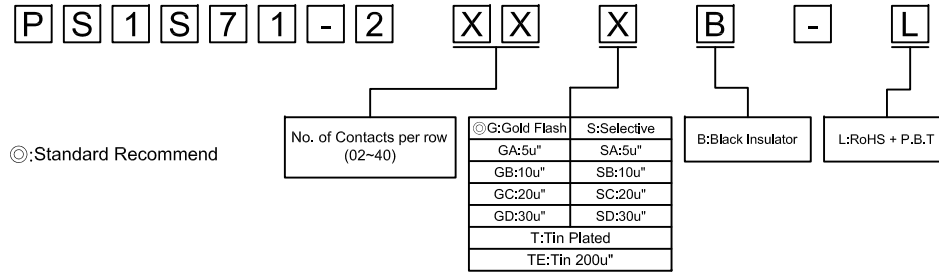

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

 耀德企業有限公司 Amtek Technology Co., Ltd. TEL:886-2-2268-8036 FAX:886-2-2268-8035	品名 TITLE	FEMALE HEADER 2.54 PLASTIC HEIGHT 7.1mm STRAIGHT TYPE				
	品號 PART NO.	PS1S71-2XX-L			日期 DATE	2009/12/07
	圖號 DRAWING NO.	PS1S71-2XX-L	版本 REV.	B	繪圖 DRAWN	Joe
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Paul
	公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	核准 APPROVED	James

△	B	Updates the drawing	Joan 2013/09/27
AREA	REV.	DESCRIPTION	DATE